



SOCIALIZING



CLIMBING






SLIDING



INFORMATION ABOUT THE PRODUCT

| | |
|---|--------------------|
| Dimensions | 1250 x 691 cm |
| Safety zone | 1600 x 1091 cm |
| Safety zone area | 102 m ² |
| Overall height | 453 cm |
| Free fall height | 150 cm |
| Amount of users | 70 |
| Product complies with EN 1176-1:2017-12 | YES |
| Availability of spare parts | YES |
| Age range | 3-12 |
| <small>According to EN 1176-1:2017-12 norm, the product requires applying a safety surface according to the product's free fall height.</small> | |



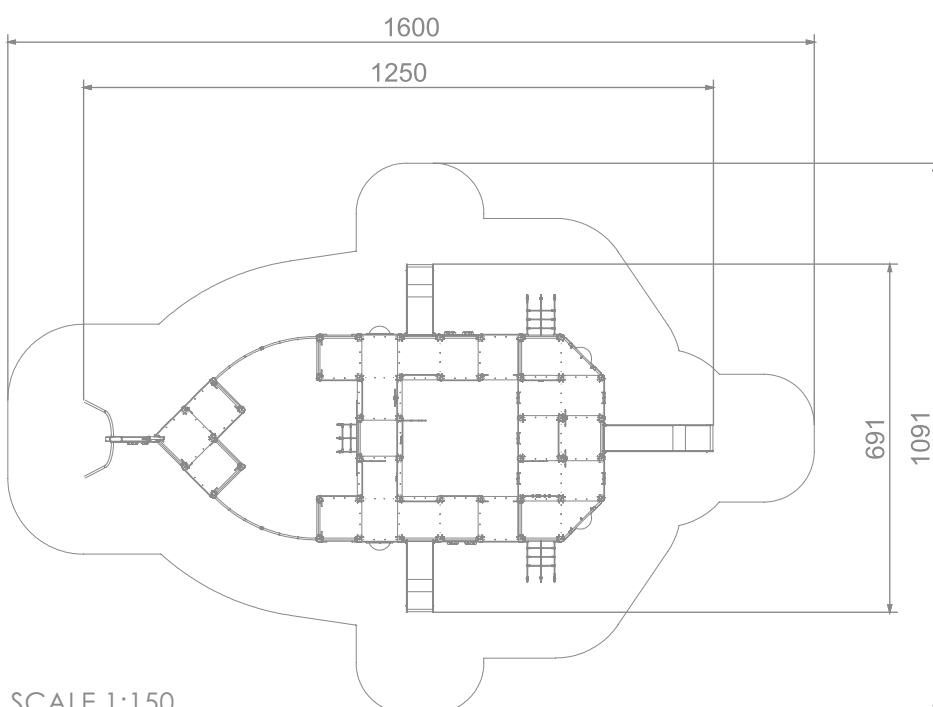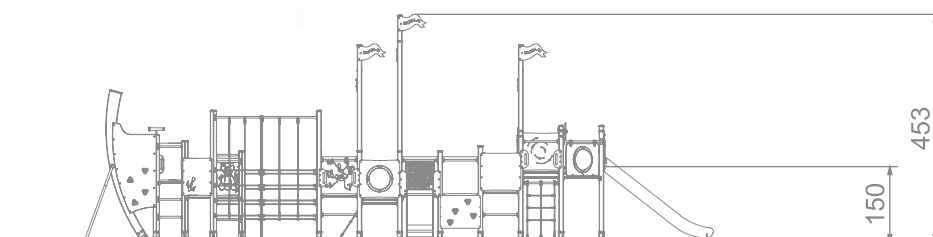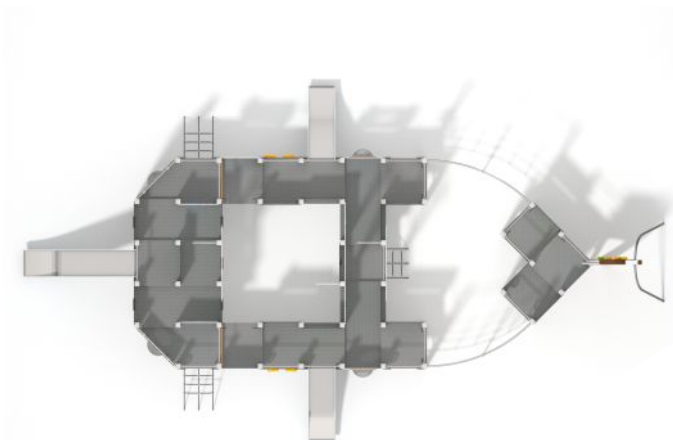

SCALE 1:150

MATERIALS:

SLIDES MADE OF STAINLESS STEEL AISI 304. METAL SHEET WITH A THICKNESS OF 2 MM FORMED IN A CNC TECHNIQUE.



HEMISPHERIC WINDOW WITH A DIAMETER OF 400 MM.



PLATES OF THE WALLS MADE OF COLOURFUL TRIPLE LAYERED 15 MM HDPE POLYETHYLENE, IN THE HIGHEST QUALITY, TOTALLY DAMP-PROOF.



SOLID AND ESTHETIC ROPE CONNECTORS MADE OF INJECTION MOLDED POLYAMIDE.



SOFT CONIFER WOOD CORELESS, GLUED IN LAYERS WITH POLYURETHANE GLUES, TOTALLY RESISTANT TO WATER.



WOODEN POSTS ANCHORED TO THE GROUND WITH POWDER GALVANIZED AND POWDER COATED STEEL ANCHORS.



SYSTEM OF CONNECTORS AND CLAMPS MADE OF STRONG ALUMINIUM ALLOY.



POLYPROPYLENE ROPES PP-MULTISPLIT TYPE WITH A STEEL CORE AND A DIAMETER OF 16 MM.



ANTI-SLIP ANTHRACITE 10MM HPL PLATFORM PLATE WITH A VERY HIGH RESISTANCE TO WEATHER CONDITIONS AND ATTRITION.

